

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number  
**WO 2005/016809 A1**

(51) International Patent Classification<sup>7</sup>: **B65H 75/24**,  
B62B 1/22

(21) International Application Number:  
PCT/NZ2004/000187

(22) International Filing Date: 16 August 2004 (16.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
527666 15 August 2003 (15.08.2003) NZ  
528331 18 September 2003 (18.09.2003) NZ

(71) Applicant and

(72) Inventor: **HUTCHINSON, Vaughan, John** [NZ/NZ];  
175 Surrey Road, RD 8, Tariki, Inglewood, Taranaki (NZ).


(74) Agent: **TYRER-HARDING, Denise**; Pipers Central, P.O.  
Box 19-334, Hamilton (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **ADJUSTABLE LEAD, CORD, ROPE OR SHEET STORAGE DEVICE**

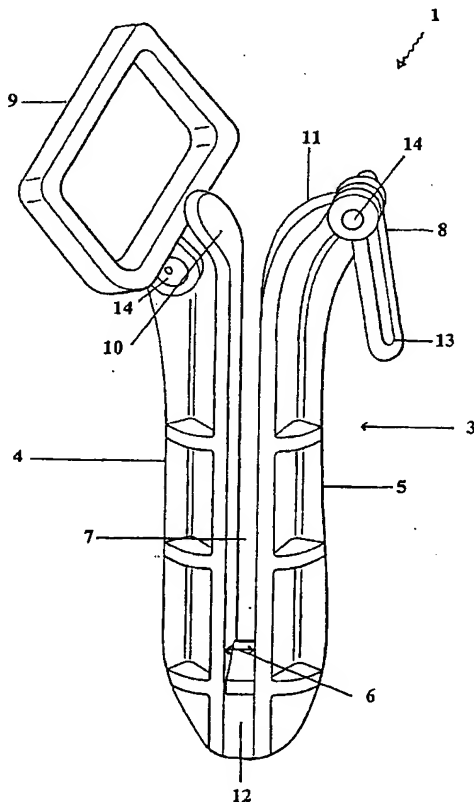

(57) Abstract: A storage device (1) for storing a lead, rope, chain, solid sheet or elongate material, including a body (3) comprising at least one elongate backbone (4) and at least one elongate tine (5) interconnected thereto (12) but separated from by a defined distance to form a channel (6) adapted to receive a lead, rope, chain, solid sheet or elongate material, support means (9) and a latch apparatus (8), the channel (6) being of a dimension to allow only one length of a lead, rope or chain to fit between the backbone (4) and tine (5) at a time (5), preventing tangling of the lead, rope or chain. The storage device (1) may be attached to a wheeled frame or stand for ease of transport.

WO 2005/016809 A1



**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*